



City of Elko Clerk's Department
1751 College Avenue
Elko, NV 89801
(775) 777-7126
FAX (775) 777-7129

**CITY OF ELKO
WATER MAIN REMOVAL AND
REPLACEMENT PROJECT
ADDENDUM NO. 2
FEBRUARY 7, 2018**

Please confirm receipt of ADDENDUM NUMBER TWO AND FAX BACK TO (775) 777-7129 or email to cityclerk@elkocity.nv.gov.

RECEIVED:

SIGNATURE

COMPANY NAME

Dated this 7th day of February, 2018.

Elko City Clerk

Shanell Owen, MMC

***** PLEASE NOTE RECEIPT OF ADDENDUM NUMBER TWO ON
APPLICABLE LINE ON SUBMITTED BID PROPOSAL *****

ADDENDUM NUMBER TWO
to the
**WATER MAIN REMOVAL AND
REPLACEMENT PROJECT
BID DOCUMENTS, SPECIFICATION AND
PLANS**

To all prospective bidders under the specifications for the **Water Main Removal and Replacement Project**, for which bids are to be received by the City of Elko, at the office of the Elko City Clerk located at 1751 College Avenue, Elko, Nevada 89801, until 3:00 P.M., local time, on Tuesday, February 13th, 2018.

The following changes, deletions and additions are herein made and become a part of the Project Bidding Documents, Specifications and Plans for the above referenced Project.

- 1) The **Bid Schedule** calls out 27 service connections but there are only 22 shown on the Plans. The **Bid Schedule** has been corrected to show the same number of Service Connections as shown on the Plans.
- 2) All existing service connections are to be maintained in place or through the use of a temporary line until the new main is installed, pressure tested, disinfected, and flushed. After this is completed and approved by the City, then the service connections are to be disconnected from the existing or temporary line and connected to the new main.
- 3) The average distance of the service lines to the new main are approximately 5' from the near side of the alley and approximately 15' from the far side of the alley.
- 4) Asphalt patching of existing streets will be required at the points of connection at A Street, 1st Street, 3rd Street, 11th Street, Front Street, and Wilson Avenue. The City of Elko Standard Detail for Pavement Patch is attached to this Addendum No. 2.
- 5) It is assumed that the City's hot tapping machine will fit into the trench excavated for the new main installation at the 4 locations which will require a hot tap, so no extra patching quantity was included in the Bid Schedule.

4.0 **EXHIBITS**

EXHIBIT 1 - BID FORM

THIS FORM, FULLY COMPLETED, MUST BE USED FOR ALL BIDS

TO THE CITY OF ELKO, NEVADA:

The undersigned bidder hereby offers, in the amount stated in Exhibit 1 – Bid Form, to furnish all labor, materials, tools, equipment, apparatus, facilities, transportation, incidental items and permits (except as otherwise stated in the Contract Documents) for the construction of the Project, described as follows:

**THE CITY OF ELKO
WATER MAIN REMOVAL AND REPLACEMENT PROJECT**

The bidder agrees that the work will be performed in accordance with the Contract Documents together with incidental items necessary to complete the work to be constructed in accordance with the Contract, any and all Exhibits to the Contract, Exhibit 16 – Technical Specifications, Exhibit 8 – Project Construction Plans and also in accordance with the "*Standard Specifications and Details for Public Works Construction*", 2016 Revised Edition, and amendments (Orange Book) as adopted by the City of Elko, Nevada.

Item No. & Work Description	Quantity	Unit	Unit Price	Bid Amount
1) Mobilization/Demobilization	1	L.S.		
2) 6" Dia. P.V.C. Water Main	1670	L.F.		
3) 2" Dia. Polyethylene Water Main	6	L.F.		
4) 18" x 6" Tapping Tee & Valve	1	EA.		
5) 12" x 6" Tapping Tee & Valve	1	EA.		
6) 8" x 6" Tapping Tee & Valve	1	EA.		
7) 6" Tapping Tee & Valve	1	EA.		
8) 6" x 2" Reducer	4	EA.		
9) 2" – 90° Bend	2	EA.		
10) 6" – 45° Bend	4	EA.		
11) 6" x 2" Tee	1	EA.		


12) 2" Tee	1	EA.		
13) 2" Gate Valve	2	EA.		
14) 6" Gate Valve	1	EA.		
15) Connect Existing Services	22	EA.		
16) Replace P.C.C. Sidewalk	390	S.F.		
17) Replace Curb & Gutter	70	L.F.		
18) Pavement Patch	460	S.F.		
19) Traffic Control	1	L.S.		

TOTAL BASE BID AMOUNT (BID ITEMS NO. 1 – NO. 19) IN NUMBERS =

\$ _____

TOTAL BASE BID AMOUNT (BID ITEMS NO. 1 – NO. 19) IN WRITTEN FORM =

BASE BID INSTRUCTIONS: The Base Bid amount is to be stated in legible figures only and is the total amount bid for the entire contract work, including all applicable taxes. Any alteration, erasure or change must be clearly indicated and initialed by the bidder. The bidder agrees that the following, without limitation, may, in the City's discretion, constitute grounds for rejecting this bid as non-responsive: (1) one or more blanks are not filled in; (2) the bid form is not signed by an authorized representative of the bidder; (3) any words or figures are not legible; (4) there are discrepancies in the figures (to include arithmetical errors); (5) the bid is not submitted with a compliant bid bond; (6) the bidder supplies false information on this bid form; or (7) the bidder fails to provide information required by this bid form or Nevada law.

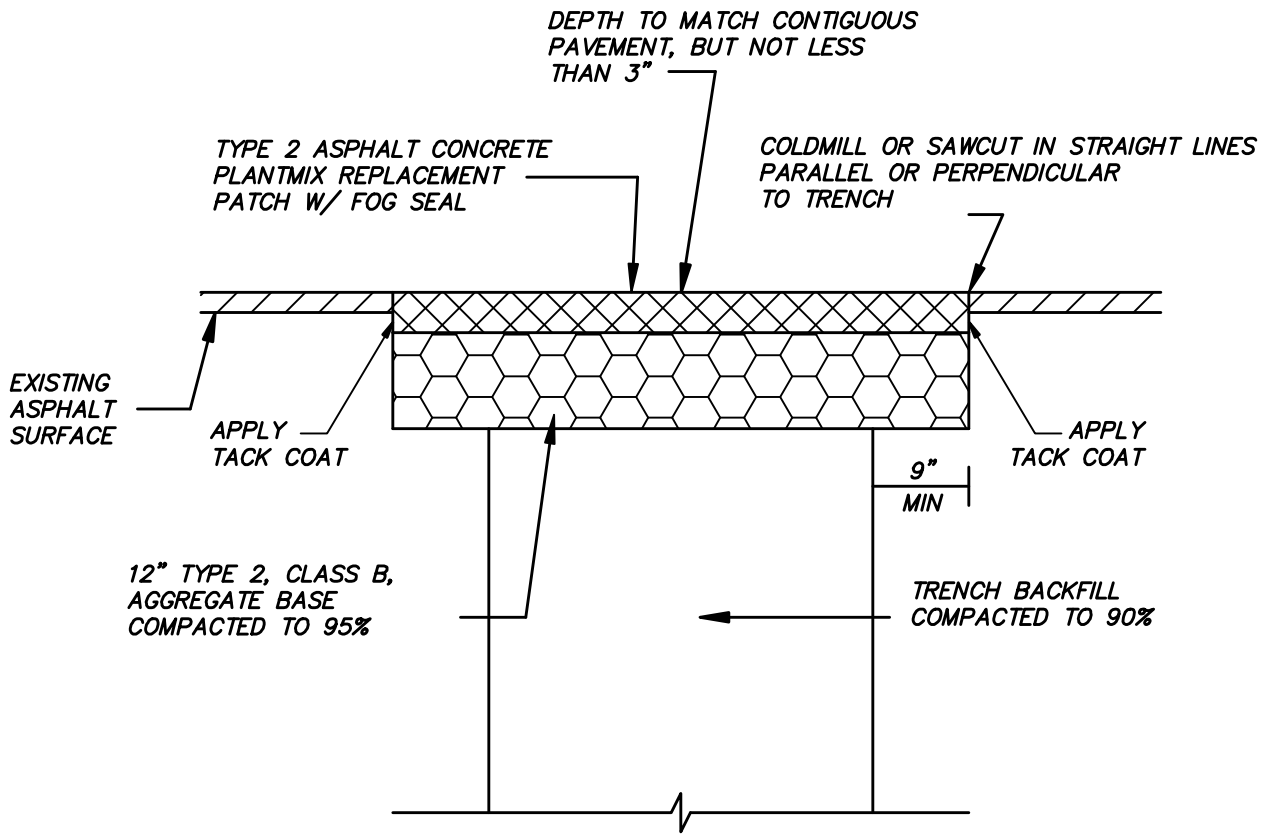

NOTES:

1. IF COLDMILL OR SAWCUT IS WITHIN 24" OF EDGE OF PLANTMIX PAVING, REMOVE EXISTING PAVEMENT TO THAT EDGE AND REPLACE ENTIRE SECTION.
2. USE AC-20 ASPHALT CEMENT IN ALL LIFTS OF TYPE 2 PLANTMIX BITUMINOUS SURFACES.
3. APPLY A SEAL COAT USING SS-1 EMULSIFIED ASPHALT (MIXED WITH AN EQUAL AMOUNT OF WATER). APPLY AT A RATE OF 0.10 GPSY AND APPLY SAND BLOTTER AS NECESSARY.
4. FOR MULTIPLE PLANTMIX BITUMINOUS COURSES, TACK COAT SHALL BE APPLIED BETWEEN EACH PLANTMIX BITUMINOUS COURSE.

NO.	REVISION	DATE	STANDARD DETAILS FOR PUBLIC WORKS CONSTRUCTION	SECTION ROADWAY	
			PAVEMENT PATCH	DRAWING NO. R-9.1	
			CITY OF ELKO, NEVADA	DATE 11/30/07	PAGE 1