



City of Elko Clerk's Department
1751 College Avenue
Elko, NV 89801
(775) 777-7126
FAX (775) 777-7129

ADDENDUM NUMBER ONE

CENTENNIAL PARK EXPANSION

Please confirm receipt of ADDENDUM NUMBER ONE AND FAX BACK TO (775) 777-7129 or email to cityclerk@elkocitynv.gov.

RECEIVED:

SIGNATURE

COMPANY NAME

Dated this 25th day of April, 2018.

Elko City Clerk

Shanell Owen, MMC

***** PLEASE NOTE RECEIPT OF ADDENDUM NUMBER ONE ON
APPLICABLE LINE ON SUBMITTED BID PROPOSAL *****



**CITY OF ELKO
ENGINEERING DEPARTMENT
1755 COLLEGE AVENUE
ELKO, NEVADA 89801
(775)777-7210
(775)777-7219 FAX**

ADDENDUM #1
CENTENNIAL PARK EXPANSION

April 24, 2018

This addendum addresses additions, changes, and clarifications to the Contract documents and Contract Drawings for the City of Elko Redevelopment Agency, Centennial Park Expansion Project.

Clarifications:

- 1 – Prevailing Wages are NOT required for this project, unless your bid exceeds \$250,000. The engineer's estimate for the project is \$190,000.
- 2 – Questions for this bid are due to the City Clerk's Office by 5:00 pm Local Time on Friday, April 27.
- 3 – Topsoil shall conform to Section 200.08 of the Standard Specifications for Public Works Construction, "Orange Book", 2016 edition.
- 4 – The brown paint used on the tower legs is Sherwin Williams, Brevity Brown #6068, with a Satin finish. Contractor shall match this paint for the reader board support posts.


Changes:

- 1 – The bid form has been revised, as attached hereto, to correct the numbering error.
- 2 - The bid form has been revised, as attached hereto, to correct the number of Prairie Fire Crab Apple Trees to one.
- 3 - The bid form has been revised, as attached hereto, to add one Choke Cherry tree as bid item #25.
- 4 - The bid form has been revised, as attached hereto, to add shredded bark as bid item #26.
- 5 – The 60"Ø storm drain manhole shown on sheet C3, and in the revised bid form as item #19, may be cast in place, or made of precast parts at the discretion of the contractor.

6 – In the supplemental provisions for the reader boards, there is a typographical error: “power coated” should read, “powder coated”. Additionally, minor deviations from this specification will be allowed to match standard models available from manufacturers.

Thank you for your interest in bidding this project.

Bob Thibault, P.E., P.L.S.
City of Elko
Civil Engineer

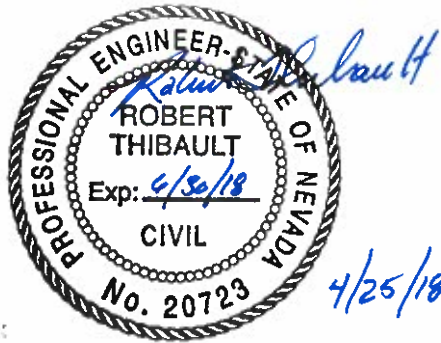

ELKO REDEVELOPMENT AGENCY

1751 College Avenue, Elko, NV 89801

(775) 777-7100

EXHIBIT 1 – REVISED BID FORM 04/24/18

THIS FORM, FULLY COMPLETED, MUST BE USED FOR ALL BIDS

TO THE ELKO REDEVELOPMENT AGENCY:

The undersigned bidder hereby offers, in the amount stated in Exhibit 1 – Bid Form, to furnish all labor, materials, tools, equipment, apparatus, facilities, transportation, incidental items and permits (except as otherwise stated in the Contract Documents) for the construction of the Project, described as follows:

CENTENNIAL PARK EXPANSION

The bidder agrees that the work will be performed in accordance with the Contract Documents together with incidental items necessary to complete the work to be constructed in accordance with the Contract, any and all Exhibits to the Contract, Exhibit 16 – Technical Specifications, Exhibit 8 – Project Construction Plans and also in accordance with the "Standard Specifications and Details for Public Works Construction", 2016 Revised Edition, and amendments (Orange Book).

The Base Bid is itemized as follows:

| Item No. & Work Description | Quantity | Unit | Unit Price | Bid Amount |
|--|-----------------|-------------|-------------------|-------------------|
| 1. Provide Traffic Control @ _____ _____ per Lump Sum. | 1 | LS | \$ _____ | \$ _____ |
| 2. Mobilization and Demobilization @ _____ _____ per Lump Sum. | 1 | LS | \$ _____ | \$ _____ |
| 3. 3" AC Paving on 6" Type 2 Aggregate Base, Compacted, in place @ _____ _____ per Square Yards. | 475 | SY | \$ _____ | \$ _____ |
| 4. Construct Type 1 Curb and Gutter, with Type 2 Aggregate Base, Compacted, in Place @ _____ _____ per Lineal Foot. | 206 | LF | \$ _____ | \$ _____ |

ELKO REDEVELOPMENT AGENCY

1751 College Avenue, Elko, NV 89801

(775) 777-7100

| | | | | |
|--|-------|----|----------|----------|
| 5. Construct barrier curb with Type 2 Aggregate Base, Compacted, in Place @ _____ _____ per Lineal Foot. | 240 | LF | \$ _____ | \$ _____ |
| 6. Construct 4" Thick Concrete Sidewalk, with Type 2 Aggregate Base Material, Compacted, in Place @ _____ _____ per Square Foot. | 2,572 | SF | \$ _____ | \$ _____ |
| 7. Construct ADA Ramp, with Type 2 Aggregate Base, Compacted, in Place @ _____ _____ per Square Foot. | 452 | SF | \$ _____ | \$ _____ |
| 8. Remove and Dispose of Concrete Sidewalk @ _____ _____ per Square Foot. | 904 | SF | \$ _____ | \$ _____ |
| 9. Remove and Dispose of Concrete Curb and Gutter @ _____ _____ per Lineal Foot. | 305 | LF | \$ _____ | \$ _____ |
| 10. Remove and Dispose of Concrete Catch Basin @ _____ _____ per Each. | 1 | EA | \$ _____ | \$ _____ |
| 11. Abandon Existing Catch Basin in Place. Remove and Dispose of Grate. Fill Basin with Concrete. @ _____ _____ Per Each. | 1 | EA | \$ _____ | \$ _____ |
| 12. Import Fill Material from City Cemetery Stockpile. Transport, Place and Compact Below Turf Area @ _____ _____ per Cubic Yard. | 100 | CY | \$ _____ | \$ _____ |
| 13. Import 3" Minus, Random Fill Material. Purchase, Transport, Place and Compact Below Turf Area @ _____ _____ per Cubic Yard. | 250 | CY | \$ _____ | \$ _____ |
| 14. Import 2" thick layer of topsoil in turf area @ _____ _____ per Cubic Yard. | 64 | CY | \$ _____ | \$ _____ |

ELKO REDEVELOPMENT AGENCY

1751 College Avenue, Elko, NV 89801

(775) 777-7100

| | | | | |
|--|--------|----|----|----|
| 15. Adjust N-9 Electrical Box to Finished Grade @ _____ _____ per Each. | 4 | EA | \$ | \$ |
| 16. Adjust N-36 Electrical Box to Finished Grade @ _____ _____ per Each. | 4 | EA | \$ | \$ |
| 17. Construct 18"Ø N-12 Storm Drain Pipe @ _____ _____ per Lineal Foot. | 15 | LF | \$ | \$ |
| 18. Construct Type 4R Drop Inlet @ _____ _____ per Each. | 1 | EA | \$ | \$ |
| 19. Construct 60"Ø Storm Drain Manhole @ _____ _____ per Each. | 1 | EA | \$ | \$ |
| 20. Furnish and Install Irrigation System per Plan @ _____ _____ per Square Foot. | 9,300 | SF | \$ | \$ |
| 21. Furnish and Install Sod @ _____ _____ per Square Foot. | 10,450 | SF | \$ | \$ |
| 22. Furnish and Install 2" Caliper Prairie Fire Crab Apple Tree @ _____ _____ per Each. | 1 | EA | \$ | \$ |
| 23. Furnish and Install 2" Caliper Hackberry Tree @ _____ _____ per Each. | 2 | EA | \$ | \$ |
| 24. Furnish and Install 24" x 36" Reader Boards @ _____ _____ per Each. | 6 | EA | \$ | \$ |
| 25. Furnish and Install 2" Caliper Choke Cherry Tree @ _____ _____ per Each. | 1 | EA | \$ | \$ |
| 26. Furnish and Install Shredded Bark @ _____ _____ per Square Foot. | 104 | SF | \$ | \$ |

TOTAL BASE BID AMOUNT (BID ITEMS NO. 1 – NO. 26) IN NUMBERS =

\$ _____

TOTAL BASE BID AMOUNT (BID ITEMS NO. 1 – NO. 26) IN WRITTEN FORM =
